

# ZBGF




**ZBGF**

DE-ID-1015




THREADING SOLUTIONS


# Zirkular Bohrgewindefräser 4.0

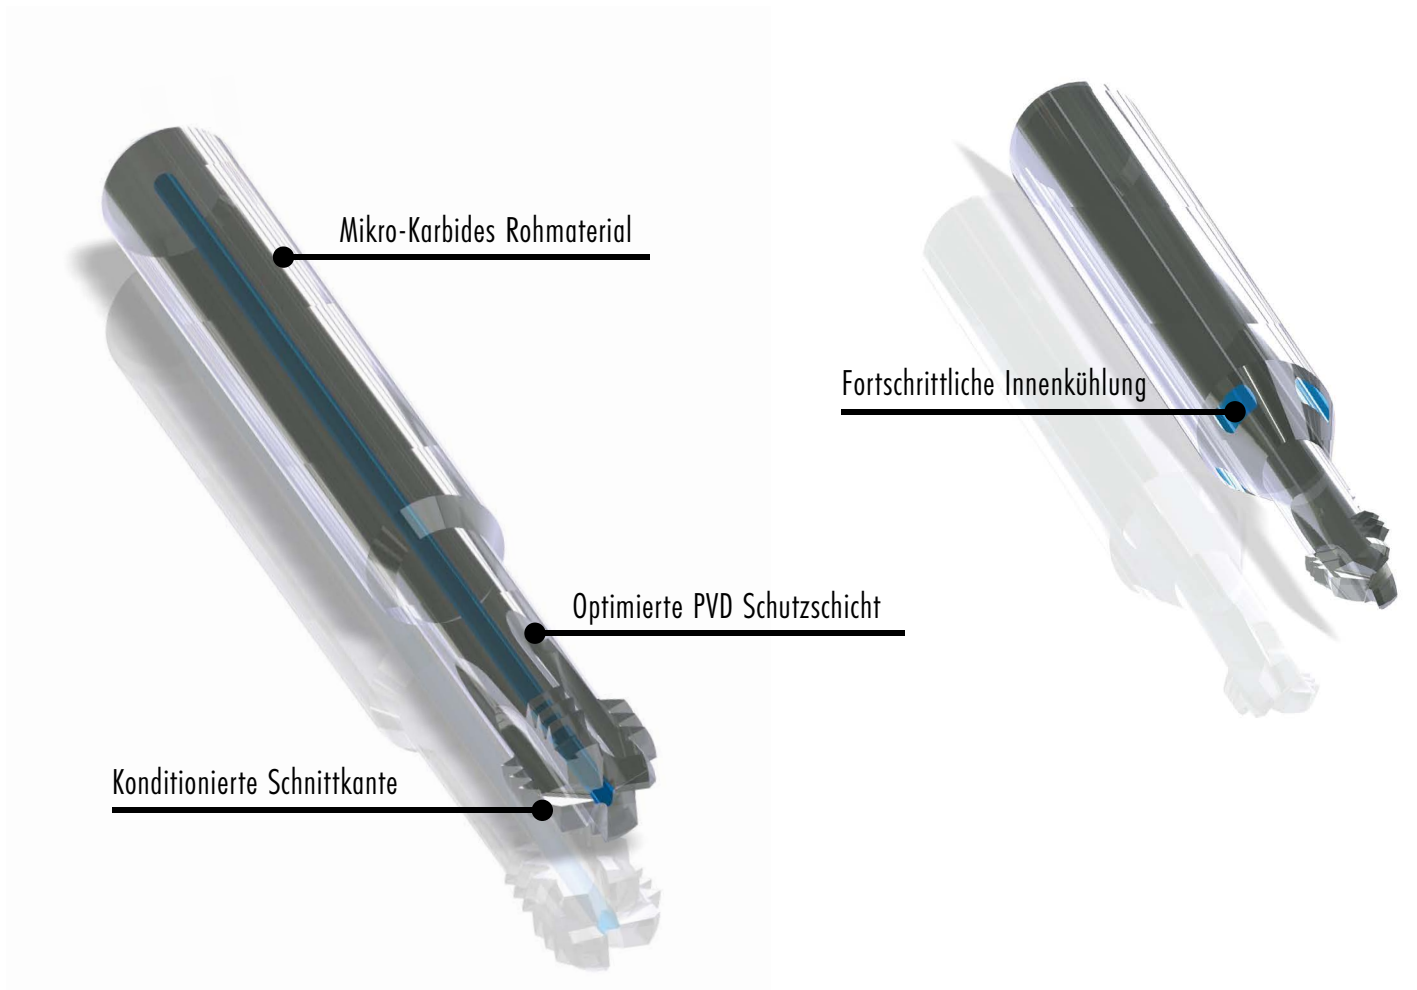

## Programmierzklus

- Linksschneide (Gegenuhrzeigersinn)
- Gewindetiefe bis  $3 \times D_1$  möglich
- Dank IK optimale Spanabfuhr (min 20 bar)

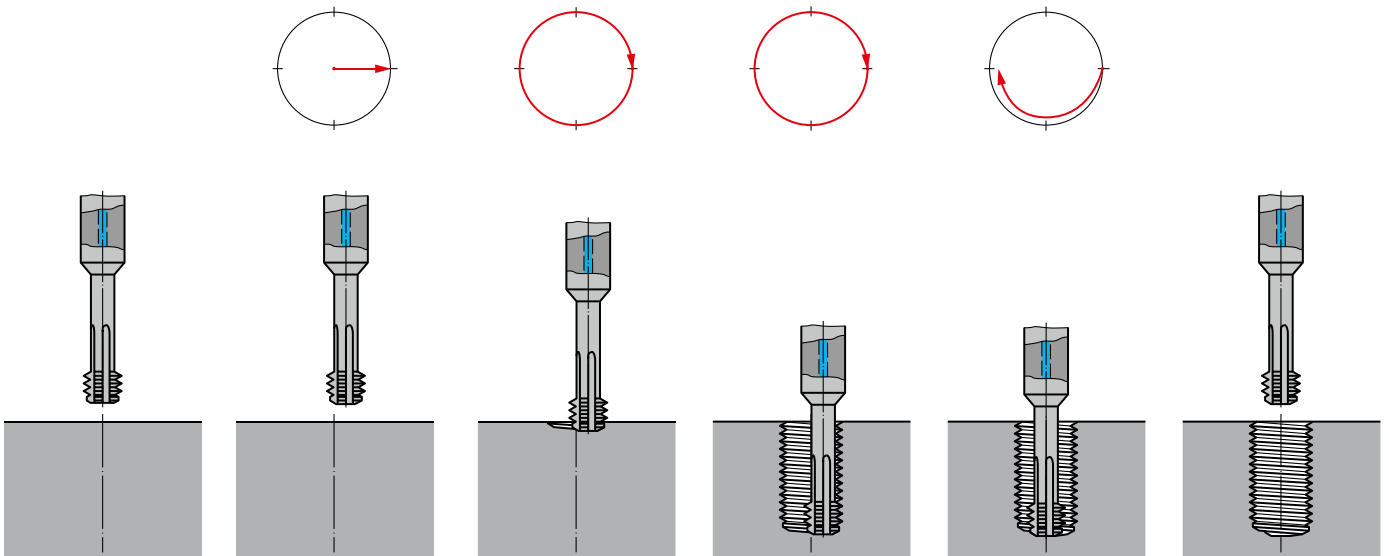



# ZBGF



ZBGF6065VS

ZBGF6067VS

ZBGF6065VS



ZBGF6067VS

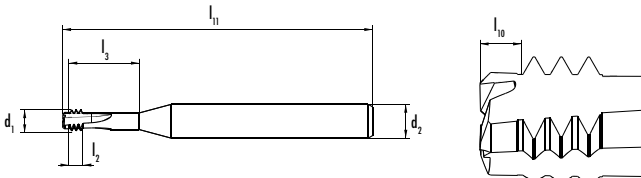

$\varnothing D_1$ M	P mm	$d_1$ mm	$l_{11}$ mm	$l_2$ mm	$l_3$ mm	$d_2$ h6 mm	$l_{10}$ mm	
------------------------	---------	-------------	----------------	-------------	-------------	----------------	----------------	--

ID

3	0.50	2.43	55	1.5	7.5	4	0.75	3
4	0.70	3.05	55	2.1	10.1	6	1.05	3
5	0.80	4.08	55	2.4	12.4	6	1.20	3
6	1.00	4.50	64	3.0	15.0	6	1.50	4
8	1.25	5.95	64	3.8	19.8	6	1.88	4
10	1.50	7.95	74	4.5	24.5	8	2.25	4
12	1.75	9.95	80	5.3	29.3	10	2.63	4
16	2.00	11.95	92	6.0	38.0	12	3.00	4


181605  
181606  
181607  
181608  
181609  
181610  
181611  
181612

$\varnothing D_1$ M	P mm	$d_1$ mm	$l_{11}$ mm	$l_2$ mm	$l_3$ mm	$d_2$ h6 mm	$l_{10}$ mm	
------------------------	---------	-------------	----------------	-------------	-------------	----------------	----------------	--





ID

3	0.50	2.43	55	1.5	10.5	4	0.75	3
4	0.70	3.05	55	2.1	14.1	6	1.05	3
5	0.80	4.08	55	2.4	17.4	6	1.20	3
6	1.00	4.50	72	3.0	21.0	6	1.50	4
8	1.25	5.95	72	3.8	27.8	6	1.88	4
10	1.50	7.95	90	4.5	34.5	8	2.25	4
12	1.75	9.95	102	5.3	41.3	10	2.63	4
16	2.00	11.95	115	6.0	54.0	12	3.00	4

181613  
181614  
181615  
181616  
181617  
181618  
181619  
181620



# ZBGF

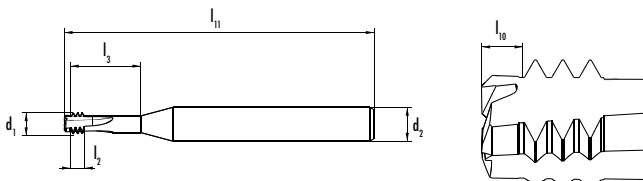
**ZBGF6065VS**

**ZBGF6067VS**

**ZBGF6065VS**
**ZBGF6067VS**


$\varnothing D_1$ UNCTPI	P mm	$d_1$ mm	$l_{11}$ mm	$l_2$ mm	$l_3$ mm	$d_2$ h6 mm	$l_{10}$	
4	40	2.11	55	1.9	7.6	4	0.95	3
6	32	2.59	55	2.4	9.4	4	1.19	3
8	32	3.10	55	2.4	10.8	6	1.19	3
10	24	3.60	55	3.2	12.9	6	1.59	3
1/4	20	4.80	64	3.8	16.6	6	1.91	4
5/16	18	5.95	64	4.2	20.2	6	2.12	4
3/8	16	7.10	74	4.8	23.9	8	2.38	4
1/2	13	9.95	80	5.9	31.3	10	2.93	4
5/8	11	11.95	92	6.9	38.7	12	3.46	4

**ID**
**183509**  
**183510**  
**183511**  
**183512**  
**183513**  
**183514**  
**183515**  
**183516**  
**183517**

$\varnothing D_1$ UNCTPI	P mm	$d_1$ mm	$l_{11}$ mm	$l_2$ mm	$l_3$ mm	$d_2$ h6 mm	$l_{10}$	
4	40	2.11	55	1.9	10.5	4	0.95	3
6	32	2.59	55	2.4	12.9	4	1.19	3
8	32	3.10	55	2.4	14.9	6	1.19	3
10	24	3.60	55	3.2	17.7	6	1.59	3
1/4	20	4.80	72	3.8	22.9	6	1.91	4
5/16	18	5.95	72	4.2	28.1	6	2.12	4
3/8	16	7.10	90	4.8	33.4	8	2.38	4
1/2	13	9.95	102	5.9	44.0	10	2.93	4
5/8	11	11.95	115	6.9	54.6	12	3.46	4

**ID**
**183518**  
**183519**  
**183520**  
**183521**  
**183522**  
**183523**  
**183524**  
**183525**  
**183526**



# ZBGF



ZBGF6065VS

ZBGF6067VS

ZBGF6065VS



ZBGF6067VS

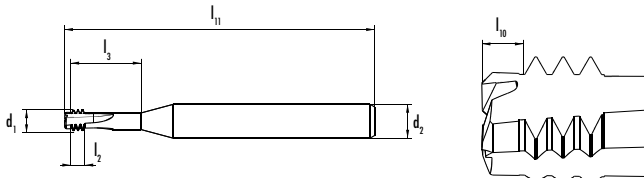

$\varnothing D_1$ UNFTPI	P mm	$d_1$ mm	$l_{11}$ mm	$l_2$ mm	$l_3$ mm	$d_2$ h6 mm	$l_{10}$ mm	
-----------------------------	---------	-------------	----------------	-------------	-------------	----------------	----------------	--

ID

4	48	2.23	55	1.6	7.3	4	0.79	3
8	36	3.10	55	2.1	10.5	6	1.06	3
10	32	3.91	55	2.4	12.1	6	1.19	3
1/4	28	4.80	64	2.7	15.5	6	1.36	4
5/16	24	5.95	64	3.2	19.1	6	1.59	4
3/8	24	7.10	74	3.2	22.3	8	1.59	4
7/16	20	7.95	74	3.8	26.1	8	1.91	4
1/2	20	9.95	80	3.8	29.3	10	1.91	4
5/8	18	11.95	92	4.2	36.0	12	2.12	4

183527
183528
183529
183530
183531
183532
183533
183534
183535

$\varnothing D_1$ UNFTPI	P mm	$d_1$ mm	$l_{11}$ mm	$l_2$ mm	$l_3$ mm	$d_2$ h6 mm	$l_{10}$ mm	
-----------------------------	---------	-------------	----------------	-------------	-------------	----------------	----------------	--

ID

4	48	2.23	55	1.6	10.2	4	0.79	3
8	36	3.10	55	2.1	14.7	6	1.06	3
10	32	3.91	55	2.4	16.9	6	1.19	3
1/4	28	4.80	72	2.7	21.8	6	1.36	4
5/16	24	5.95	72	3.2	27.0	6	1.59	4
3/8	24	7.10	90	3.2	31.8	8	1.59	4
7/16	20	7.95	90	3.8	37.2	8	1.91	4
1/2	20	9.95	102	3.8	42.0	10	1.91	4
5/8	18	11.95	115	4.2	51.9	12	2.12	4

183536
183537
183538
183539
183540
183541
183542
183543
183544

# Schnittgeschwindigkeiten und Vorschübe

Werkstoff-Gruppen	Werkstoffbezeichnung	Härte (HB)	Festigkeit Rm (N/mm <sup>2</sup> )	Vc (m/min)		Vorschub fz (mm/Zahn)	SFM (f/min)		Vorschub fz (Zoll/Zahn)
				Beschichtet	Beschichtet		Beschichtet	Beschichtet	
Stahl	11 Automatenstahl	< 200	< 700	50 – 100	0.020 – 0.060	164 – 328	0.0007 – 0.0023		
	12 Baustahl, Einsatzstahl	< 200	< 700	50 – 100	0.010 – 0.050	164 – 328	0.0003 – 0.0019		
	13 Kohlenstoffstahl	< 300	< 1000	50 – 100	0.010 – 0.050	164 – 328	0.0003 – 0.0019		
	14 Stahl legiert <850 N/mm <sup>2</sup>	< 250	< 850	50 – 100	0.010 – 0.050	164 – 328	0.0003 – 0.0019		
Stahl	15 Stahl legiert / vergütet >850 - <1150 N/mm <sup>2</sup>	> 250	> 850	40 – 80	0.010 – 0.050	131 – 262	0.0003 – 0.0019		
	16 Hochfester Stahl <55 HRC	> 250	> 850	30 – 60	0.008 – 0.040	98 – 197	0.0003 – 0.0015		
Rostfreier Stahl	21 Rostfreier Stahl / geschwefelt	< 250	< 850	40 – 80	0.010 – 0.040	131 – 262	0.0003 – 0.0015		
	22 Austenitisch	< 250	< 850	30 – 50	0.010 – 0.040	98 – 164	0.0003 – 0.0015		
	23 Ferritisch, martensitisch <850 N/mm <sup>2</sup>	< 250	< 850	30 – 60	0.010 – 0.040	98 – 197	0.0003 – 0.0015		
	24 Ferritisch, martensitisch >850 - <1150 N/mm <sup>2</sup>	> 250	> 850	30 – 50	0.010 – 0.030	98 – 164	0.0003 – 0.0011		
Guss	31 Grauguss	< 250	< 850	70 – 140	0.010 – 0.050	230 – 459	0.0003 – 0.0019		
	32 Kugelgraphitguss	< 250	< 850	50 – 100	0.010 – 0.050	164 – 328	0.0003 – 0.0019		
Titan	41 Reintitan	< 250	< 850	30 – 50	0.010 – 0.040	98 – 164	0.0003 – 0.0015		
	42 Titanlegierung	> 250	> 850	30 – 50	0.010 – 0.040	98 – 164	0.0003 – 0.0015		
Nickel	51 Nickellegierung 1 <850 N/mm <sup>2</sup>	< 250	< 850	40 – 60	0.010 – 0.030	131 – 197	0.0003 – 0.0011		
	52 Nickellegierung 2 >850 - <1150 N/mm <sup>2</sup>	> 250	> 850	30 – 50	0.010 – 0.030	98 – 164	0.0003 – 0.0011		
	53 Nickellegierung 3 >1150 - ≤1600 N/mm <sup>2</sup>	> 340	> 1150	30 – 50	0.005 – 0.030	98 – 164	0.0002 – 0.0011		
Kupfer	62 Messing, Bronze, Rotguss (kurzspanend)	< 200	< 700	100 – 200	0.010 – 0.050	328 – 656	0.0003 – 0.0019		
	63 Messing (langspanend)	< 200	< 700	100 – 200	0.010 – 0.050	328 – 656	0.0003 – 0.0019		
Aluminium Magnesium	71 Al unlegiert	< 100	< 350	100 – 200	0.010 – 0.050	328 – 656	0.0003 – 0.0019		
	72 Al legiert Si < 1.5 %	< 150	< 500	100 – 200	0.010 – 0.050	328 – 656	0.0003 – 0.0019		
	73 Al legiert Si > 1.5 % - < 10 %	< 120	< 400	100 – 200	0.010 – 0.050	328 – 656	0.0003 – 0.0019		
	74 Al legiert Si > 10 %, Mg-Legierung	< 120	< 400	70 – 140	0.010 – 0.050	230 – 459	0.0003 – 0.0019		
Kunststoff	81 Thermoplaste	.	.	80 – 180	0.050 – 0.100	262 – 590	0.0019 – 0.0039		
	82 Duroplaste	.	.	80 – 180	0.020 – 0.080	262 – 590	0.0007 – 0.0031		
	83 Faserverstärkte Kunststoffe	.	.	50 – 150	0.020 – 0.100	164 – 492	0.0007 – 0.0039		
Edelmetall	91 Gelbgold	.	.	80 – 120	0.020 – 0.080	262 – 394	0.0007 – 0.0031		
	92 Rotgold	.	.	50 – 100	0.010 – 0.050	164 – 328	0.0003 – 0.0019		
	93 Weissgold	.	.	40 – 80	0.010 – 0.040	131 – 262	0.0003 – 0.0015		
	94 Silber	.	.	50 – 100	0.010 – 0.050	164 – 328	0.0003 – 0.0019		